

linear dimension (Tolerances Standard GB/T 14486-2008)										—		⊥
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to			
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60		

REVISION RECORD				
REV.	DESCRIPTION	ECN No.	APPROVED	DATE
A	新发行		CLF	21.12.15

UL/CUL 技术参数

UL/CUL Technical Data

等级	Use Group	B	C	D
额定电压	Rated Voltage	[V]	300	- 300
额定电流	Rated Current	[A]	10	- 10
接线范围	Wire Range	24-12		
单/多芯线	Solid/Stranded			
耐电压	Withstanding Voltage	AC1600V/1Min		

IEC 技术参数

IEC Technical Data

过电压类别	Overvoltage Category	III	III	II
污染等级	Contamination Class	3	2	2
额定电压	Rated Voltage	[V]	- 320	630
额定电流	Rated Current	[A]	- 15	15
额定冲击电压	Impulse withstand voltagea	[kV]	- 4.0	4.0





导线截面积	Conductor cross section	2.5
硬质/柔性导线	Solid/ flexible	

材料

Material

绝缘材料	Insulation Material	PAB6
阻燃等级	Inflammability	
导体材料	Conductor Material	铜合金 Copper alloy
导体表面镀层	Conductive Coating	镀镍 Ni plated
一般参数	Other Data	

间距	Pitch	[mm]	5.0
极数	Poles	[P]	2/24
引线长度	Shipping Length	[mm]	7.8
螺丝	Screw/扭矩 Torque(Max)	[N.m]	M2.5/0.4
工作温度	Operating temperatur	[°C]	-40+105
引针尺寸	Pin Dimensions	[mm]	-
PCB板孔径	PCB hole Diameter	[mm]	-

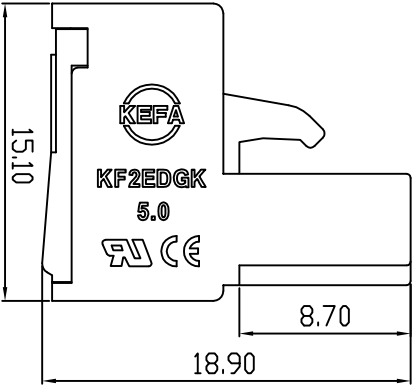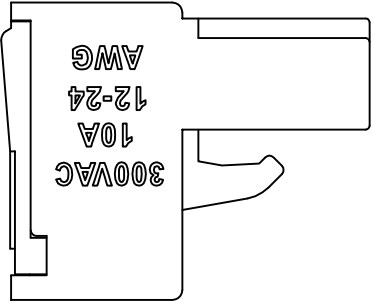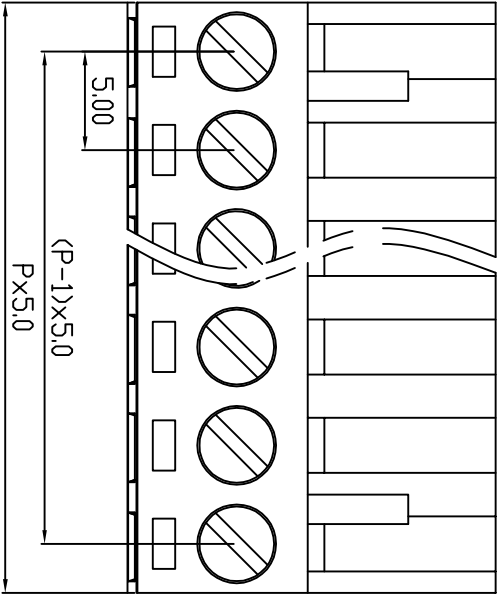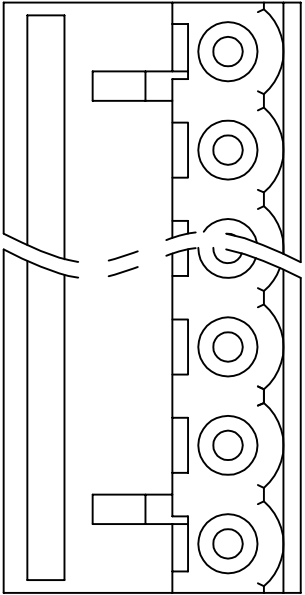

DES.	LQQ	DATE	21.12.15	单位 / UNITS		mm	尺寸 / SIZE	A4	比例 / SCALE	1:1	第二视角 / THIRD ANGLE PROJECTION			版本 /	A	
CHK.	BY	DATE	21.12.15	 慈溪市科发电子有限公司 CIXI KEFA ELECTRONIC CO., LTD											名称 /	KF2EDGK-5.0
APP.	CLF	DATE	21.12.15												TITLE	



慈溪市科发电子有限公司
CXI KEFA ELECTRONIC CO., LTD